

USER'S MANUAL

Please read the user's manual before use.



TARGUS

UNIVERSAL
Canon
rapid battery charger

Product Spec:

AC Charger Base:
Input voltage: DC 12V/3AW
Output voltage: 4.200C or 4.200C
Charge or non-charge: 4.200C or 4.200C
Size: 200x100x50mm
Weight: 200g

Extending Power Indicator:
Input voltage: AC 100-240V
Output voltage: 5V/1000mA Max

Car Charger:
Input voltage: 12V/2400C
Output voltage: 12V/2400C



TO-UCC


Feature:

- Supports 11 types of Canon cameras/lenses
- Supports the standard lens
- Supports 11 types of Canon cameras/lenses
- Supports the standard lens
- Supports 11 types of Canon cameras/lenses
- Supports the standard lens
- Supports 11 types of Canon cameras/lenses
- Supports the standard lens
- Supports 11 types of Canon cameras/lenses
- Supports the standard lens

Type	Model	Image	Charge the model number
1	BP-206	2.8x	BP-206
2	BP-210	2.8x	BP-210
3	BP-211	2.8x	BP-211
4	BP-208	2.8x	BP-208
5	BP-212	2.8x	BP-212
6	BP-213	2.8x	BP-213
7	BP-214	2.8x	BP-214
8	BP-215	2.8x	BP-215

Charging Procedure:

1. Disconnect the battery from the charge chamber.
2. Plug the AC adapter into the connector of the charger.
3. Insert the charger plug into the AC outlet and, while charging, the LED light is on.
4. When charging is done, the LED indicator will turn to green.

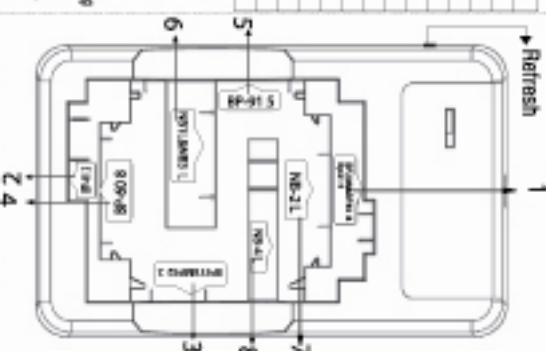

Refresh

If the battery voltage may be low to charge or an error message may be displayed, the battery should be taken to the shop and get fixed to work. But first, the battery should be fully charged and the battery can be used. Please refer to the user's manual for the battery or the power charge a new one.

Caution

1. The battery charger is for indoor use only, do not expose to water or snow.
2. The plug should be disconnected from the wall when the charging process is completed or when the charger is not in use.
3. Children should only use the charger under adult supervision.
4. Use within the 0-40°C temperature range only.
5. Charge only with Li-Ion battery only.
6. Please refer to label on the rear side of the battery charger.
7. Do not attempt to open or rearrange.
8. Do not drop or put a heavy load on this product.
9. Do not use or store under direct sunlight, near heated equipment, or in other high temperature area.

CANON(BP-1L)



CANON(BP-315)



CANON(BP-2L)



CANON(BP-412)



CANON(BP-3L)



CANON(BP-511)



CANON(BP-4L)



CANON(BP-522)



CANON(BP-208)



CANON(BP-408)



CANON(BP-308)



CANON(BP-915)

